

KNX

Expansion sleeve plug to be used with LINO and WDB-4.8/WDB-T-4.8 screw and KD steel washers
- pp. 36-37



Nylon

Description

For fixing of flat roof thermal insulation and waterproofing systems to concrete substrate using LINO sleeve and WDB screw

Technical data

Plug diameter 8 mm

Material



Features and advantages of the product



Gripped firmly in place


During the first stage of installation the plug is held firmly in place as the expansion lugs on its outside prevent it from turning once it has been placed in the hole




Widened rim

Its widened rim prevents the plug from sinking too deep into the drill hole

Substrate: by ETAG 006



Substrate: concrete C12/15, C20/25
for WDB/WDB-T fastener

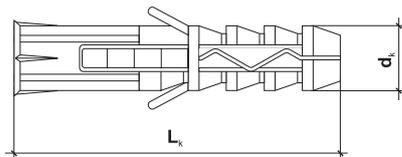

Product marking

KNX	08	050
Type	Diameter	Length

	Code	$d_k \times L_k$ [mm]	Hole diameter d_o [mm]	Pcs
ø8	KNX-08050	8 x 50	8	400

Minimum anchorage depth $h_{eff}=50\text{mm}$