

## NEW!

# POLISH



### **SMN6 SMN8**

#### BETTER HOLDING POWER

Increased head diameter ensures much better holding power of the elements being installed!

#### **SECURE FIXING**

Countersunk head is more solid with special underhead strengthening!



SMN-06050



SMN-08060



#### **EXPANSION ANCHOR TO BE USED WITH KD STEEL WASHERS**





KD-03-WW7



KD-03-W7, KD-03-W9


#### **FASTENERS FOR FLAT ROOF THERMAL INSULATION AND WATERPROOFING SYSTEM**

#### **PRODUCTION PROGRAMME**





#### Expansion anchor to be used with KD steel washers - pp. 36-37

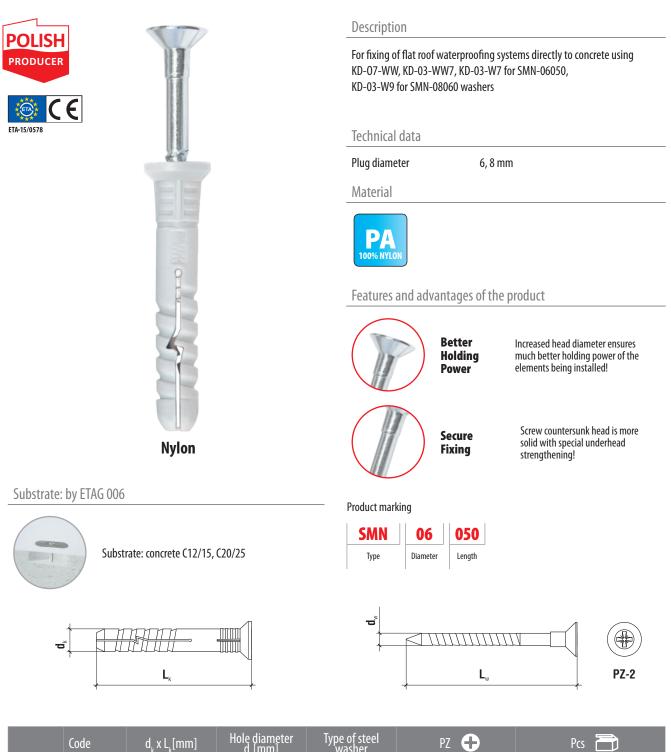

	Code	d <sub>k</sub> x L <sub>k</sub> [mm]	Hole diameter d <sub>o</sub> [mm]	lype of steel washer	PZ 🕂	Pcs 📄
ø6	SMN-06050	6 x 50	6	KD-07-WW KD-03-WW7 KD-03-W7	PZ-2	200
ø <b>8</b>	SMN-08060	8 x 60	8	KD-03-W9	PZ-2	100

Minimum anchorage depth: SMN - 6 x 50  $h_{eff}$ =50 mm SMN - 8 x 60  $h_{eff}$ =60 mm