

WBSW

Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to concrete, timber, OSB and plywood.



Substrate: by ETAG 006



Substrate: concrete C12/15, C20/25,
thin wall concrete panel



Substrate: timber C24,
OSB board, plywood

NEW!

Description

Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to concrete, timber, OSB and plywood.

Technical data

Substrate	concrete C12/15, C20/C25, thin wall concrete panel, timber, OSB board and plywood
Corrosion protection	ceramic coating
Concrete drill bit diameter	5.0 mm

Material

carbon steel

Features and advantages of the product

< 300 mm >

Screw length

We manufacture screws up to 300 mm long



TX-30

TX drive guarantees optimum torque transfer.



Ceramic coating


Highest corrosion protection



Double thread

Facilitates direct installation in concrete

WBSW Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to concrete, timber, OSB and plywood.

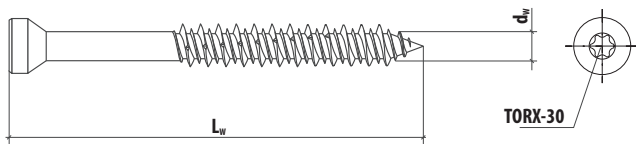

Product marking

WBSW	63	300	D
Type	Diameter	Length	Type of coating

	Code	$d_w \times L_w$ [mm]	TX	Pcs
ø6,3	WBSW-63060-D	6.3 x 60	TX-30	100
	WBSW-63070-D	6.3 x 70	TX-30	100
	WBSW-63080-D	6.3 x 80	TX-30	100
	WBSW-63090-D	6.3 x 90	TX-30	100
	WBSW-63100-D	6.3 x 100	TX-30	100
	WBSW-63120-D	6.3 x 120	TX-30	100
	WBSW-63140-D	6.3 x 140	TX-30	100
	WBSW-63160-D	6.3 x 160	TX-30	100
	WBSW-63180-D	6.3 x 180	TX-30	100
	WBSW-63200-D	6.3 x 200	TX-30	100
	WBSW-63220-D	6.3 x 220	TX-30	100
	WBSW-63240-D	6.3 x 240	TX-30	100
	WBSW-63300-D	6.3 x 300	TX-30	100

Packing



WBSW screws are supplied in sturdy cardboard boxes