

# WDB-T

Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 0.75 mm thick profiled roof sheets, timber, OSB and plywood.



**NEW!**

## Description

Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 0.75 mm thick profiled roof sheets, timber, OSB and plywood.

## Technical data

Substrate	Profiled roof sheets of 0.50 - 0.75 mm in thickness, timber, OSB board and plywood
Corrosion protection	Ceramic coating

## Material

Carbon steel

## Features and advantages of the product

**< 240 mm >**

**Screw length**

**We manufacture screws up to 240 mm long**



**TX-20**

TX drive guarantees optimum torque transfer



**Ceramic coating**

Highest corrosion protection

Substrate: by ETAG 006



Substrate: profiled roof sheets of 0.50 - 0.75 mm in thickness




Substrate: concrete C12/15, C20/25, thin wall concrete panel with KNX expansion anchor page 40



Substrate: timber C24, OSB board, plywood

### WDB-T Self-tapping screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 0.75 mm thick profiled roof sheets, timber, OSB and plywood.

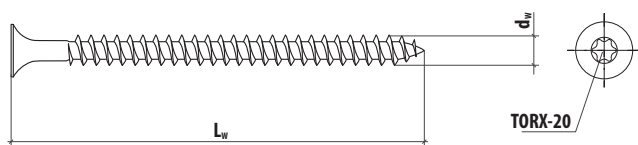

Product marking

<b>WDB-T</b>	<b>48</b>	<b>240</b>	<b>D</b>
Type	Diameter	Length	Type of coating

	Code	$d_w \times L_w$ [mm]	TX	Pcs
<b>ø4,8</b>	WDB-T-48040-D	4.8 x 40	TX-20	100
	WDB-T-48050-D	4.8 x 50	TX-20	100
	WDB-T-48060-D	4.8 x 60	TX-20	100
	WDB-T-48070-D	4.8 x 70	TX-20	100
	WDB-T-48080-D	4.8 x 80	TX-20	100
	WDB-T-48090-D	4.8 x 90	TX-20	100
	WDB-T-48100-D	4.8 x 100	TX-20	100
	WDB-T-48120-D	4.8 x 120	TX-20	100
	WDB-T-48140-D	4.8 x 140	TX-20	100
	WDB-T-48160-D	4.8 x 160	TX-20	100
	WDB-T-48180-D	4.8 x 180	TX-20	100
	WDB-T-48200-D	4.8 x 200	TX-20	100
	WDB-T-48220-D	4.8 x 220	TX-20	100
	WDB-T-48240-D	4.8 x 240	TX-20	100

**TX drive WDB-T screws are only made to order!**

#### Packing



WDB-T screws are supplied in sturdy cardboard boxes