

WSPCV-R Self-drilling screw with ribs for fittings and steel reinforcement, PH



AT-15-7179/2013



made to order

Description

Application	Screw for fixing plastic window profiles with steel reinforcement elements up to 2 mm thick.
Type of installation	This screw does not require prior drilling.
Material	Zinc plated carbon steel

Product made to order.

Features and advantages



PH head with marking

Exact head size and good workmanship make it ideal for use with automatic screwdriving unit. Letter "K" marking identifies our company as the manufacturer.



Countersunk head with special ribs

The ribs stop excessive turning of the screw in final stages of installation.



Correct thread pitch and length

The right pitch ensures correct installation of metal members.




Sharp self-drilling point



Special self-drilling point ensures easier and faster screw installation in steel.



100% of screws controlled! The parameters checked include length, shank diameter, thread diameter, head size, quality of the drive, thread pitch and length, tip and others.

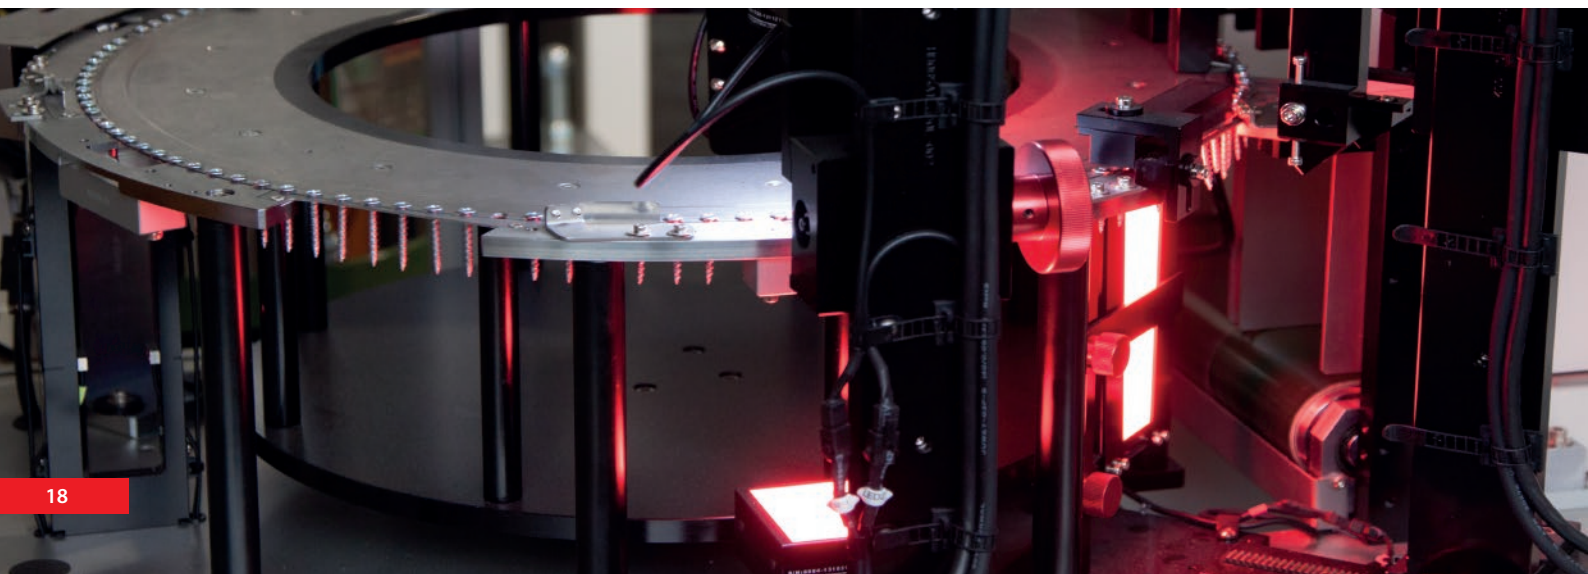

WSPCV-R Self-drilling screw with ribs for fittings and steel reinforcement, PH

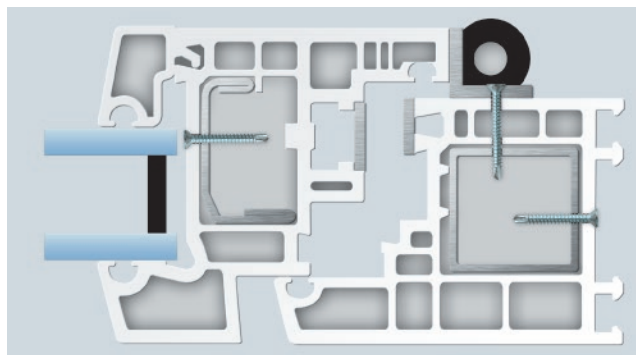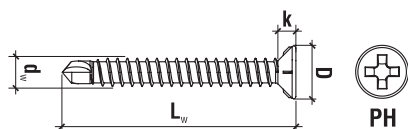

Product marking

WSPCV	R	B	39	016
Type	Special ribs	White zinc	Diameter	Length

Sample application

	Code	$d_w \times L_w$ [mm]	D [mm]	k [mm]	PH	Pcs
ø3.9	WSPCV-B-R-39016	3.9 x 16	7.5	3	PH 2	1000
	WSPCV-B-R-39019	3.9 x 19	7.5	3	PH 2	1000
	WSPCV-B-R-39025	3.9 x 25	7.5	3	PH 2	1000
	WSPCV-B-R-39032	3.9 x 32	7.5	3	PH 2	500
	WSPCV-B-R-39040	3.9 x 40	7.5	3	PH 2	500

Product made to order

