


GCOC (PN-EN 10230-1) Carpentry nails

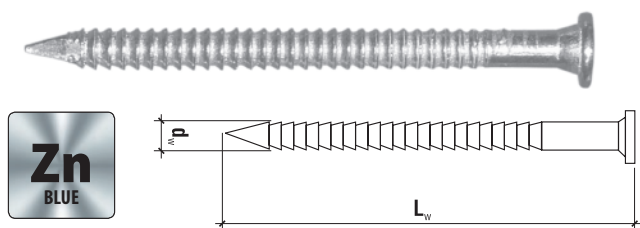


Code	$d_w \times L_w$ [mm]	Size in inches	kg
GCOC-40040	4,0 x 40	1,5"	5
GCOC-40050	4,0 x 50	2"	5
GCOC-40060	4,0 x 60	-	5
GCOC-40070	4,0 x 70	-	5
GCOC-40080	4,0 x 80	3"	5

Description

- Application** Used for woodwork lap joints, mainly in carpentry. Reinforced flat head with rough surface prevents hammer from side slipping. Sharp ridges around the shank give a tight grip.
- Installation** Does not require prior drilling.
- Substrate** Chipboard, plywood, wood, sterling board, MDF board
- Material** Galvanized low-carbon steel

GPCZ / GPOC (PN-EN 10230-1) Clout nails


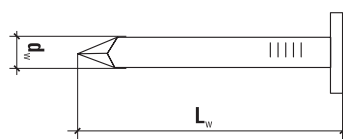


Description

- Application** Use for fixing felt roofing materials, metal sheets and metalwork to timber framework. Large flat head with smooth surface and varied length shank.
- Installation** Does not require prior drilling.
- Substrate** Chipboard, plywood, wood, sterling board, MDF board
- Material** Black finish or galvanized low-carbon steel

Code	Code	$d_w \times L_w$ [mm]	Size in inches	kg
BF BLACK FINISH	Zn BLUE			
GPCZ-25025	GPOC-25025	2,5 x 25	1"	5
GPCZ-25030	GPOC-25030	2,5 x 30	-	5
GPCZ-30025	GPOC-30025	3,0 x 25	1"	5
GPCZ-30030	GPOC-30030	3,0 x 30	-	5
GPCZ-30035	GPOC-30035	3,0 x 35	-	5
GPCZ-30040	GPOC-30040	3,0 x 40	1,5"	5

PGP Clout washers

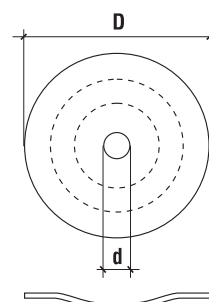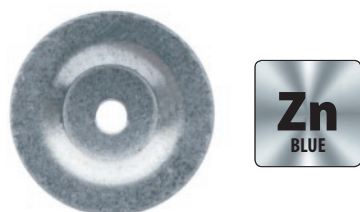

Description

- Application** Clout washers together with clout nails provide greater hold-down surface while fixing felt roofing materials.
- Material** Galvanized low-carbon steel

Code	D [mm]	d [mm]	Thickness [mm]	kg
PGP-3	27	3,5	0,8	1