

### GKW Plasterboard plugs with screws



#### Description

For lightweight fixing in plasterboard and cavity walls with relative humidity not higher than 80%.

Material: NYLON.

Screw - steel.






#### Protective coating

**Zinc coating**

#### Features and advantages of the product

**Sleeve made of nylon** Improved material elasticity facilitates installation in cavities and plasterboards.


**Countersunk head screw** Holds the fixture firmly in place.

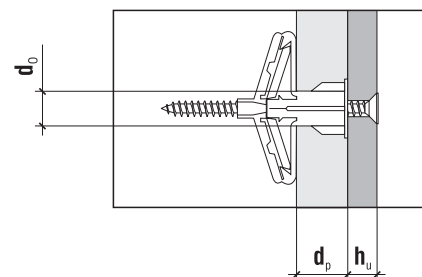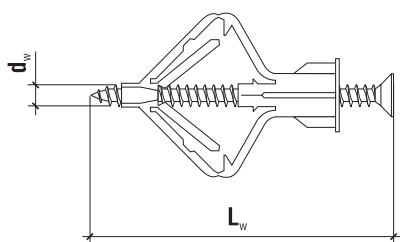

	Code	Drill hole diameter $d_0$ [mm]	Plug length $L_k$ [mm]	Screw length and diameter $d_w \times L_w$ [mm]	Minimum depth of drilled hole $h_{o\ min}$ [mm]	Minimum anchorage depth $d_p$ [mm]	Maximum fixture thickness $h_u$ [mm]	Recessed drive type	Pcs.
<b>ø10</b>	<b>GKW</b>	10	50	3.5 x 60	35	12	30	PZ-2	100

#### RESISTANCE

Code	Design resistance in perforated ceramic brick [kN]	Design resistance in plasterboard [kN]
GKW	0.13	0.17

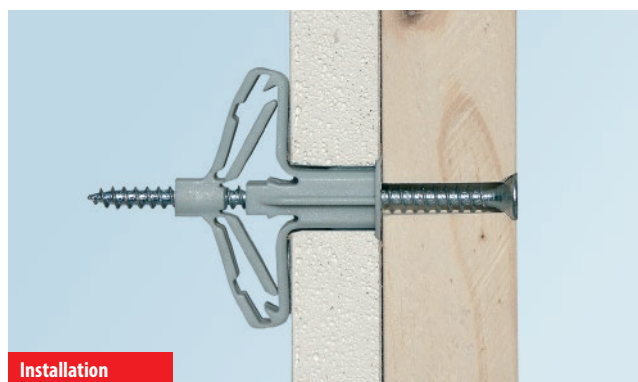

Installation

#### Installation

