


KPX Expansion plug Ø6, Ø8, Ø10, Ø12, Ø14, Ø16 - polypropylene

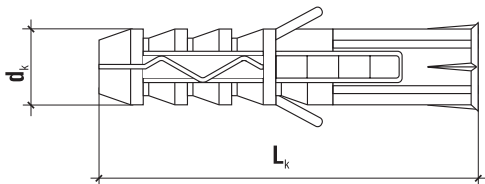

Description

Plug recommended for fixing of wood and wood-based members

Technical data

Type of installation pre-fastening installation

Sleeve material

PP
polypropylene

Features and advantages of the product



Gripped firmly in place

During the first stage of installation the plug is held firmly in place as the expansion lugs on its outside prevent it from turning once it has been placed in the hole.



Widened rim

Its widened rim prevents the plug from sinking too deep into the drill hole

Product marking

KPX	06	030
Type	Diameter	Length

	Code	$d_k \times L_k$ [mm]	Recommended screw diameter d_w	Effective anchorage depth h_{eff} [mm]	Min. depth of drilled hole h_o [mm]	Pcs
Ø06	KPX-06030	6.0 x 30	3.5 - 4	30	40	1000
Ø08	KPX-08040	8.0 x 40	4.0 - 6	40	50	500
	KPX-08050	8.0 x 50	4.0 - 6	50	60	400
Ø10	KPX-10050	10 x 50	5.0 - 7	50	60	300
	KPX-10060	10 x 60	5.0 - 7	60	70	200
Ø12	KPX-12060	12 x 60	6.0 - 8	60	70	150
	KPX-12080	12 x 80	6.0 - 8	80	90	100
Ø14	KPX-14080	14 x 80	10	80	90	100
Ø16	KPX-16100	16 x 100	12	100	110	50