


KSSG/KMSG Gypsum to steel self-drilling screw



PN-EN 14566

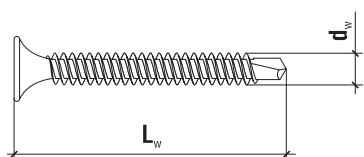

PH


Description

Screw for fastening plasterboards to steel base material.
Material: low carbon steel with phosphate finish.

Protective coating

Phosphate coating

Features and advantages of the product



PH 2 drive

One of the commonest drives provides for installation with the use of impact torsion bits.



Counter-sunk head

Countersunk head ensures flush fitting of the screw in the installed member.



Thread for steel and drill point

Thread design guarantees secure and durable fixing in steel substrate. Its sharp tip makes for a quick start installation. The self-drilling tip ensures penetration of sheets 2 x 1.25 mm thick.

	Medium-size		Small-size		Max. drilling capacity [mm]	d _w x L _w [mm]
	Code	Pcs per	Code	Pcs per		
ø3.5	KSSG-35025	1000	KMSG-35025	200	2.5	3.5 x 25
	KSSG-35035	1000	KMSG-35035	100	2.5	3.5 x 35
	KSSG-35045	500	KMSG-35045	100	2.5	3.5 x 45

RESISTANCE

Code and size	Zinc plated sheet thickness [mm]	Design pull-out resistance [kN]	Design shear load resistance [kN]
KSSG/KMSG - 3.5 x L	0.60	0.34	0.85
	1.00	0.72	2.24
	1.25	1.04	2.99