


MMS Eccentric connecting fitting

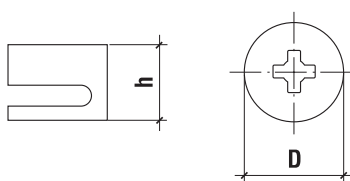

Description


Application	Element of eccentric pin applied for assembly of furniture body
Type of installation	Assembly requires previous drilling
Substrate	Chipboard, plywood, wood, sterling board, MDF board
Material	Zinc pressure die casting

Features and advantages



- Eccentric construction** Special eccentric construction facilitates the dragging of elements for distances up to 4mm
- Corrugation** Corrugation of surface secures eccentricity from opening
- Universal assembly slot** Universal assembly slot enables dragging of by Phillips screwdriver, flat-head screwdriver and hexagon socket screw key

Preparation of assembly holes depending on thickness of beam

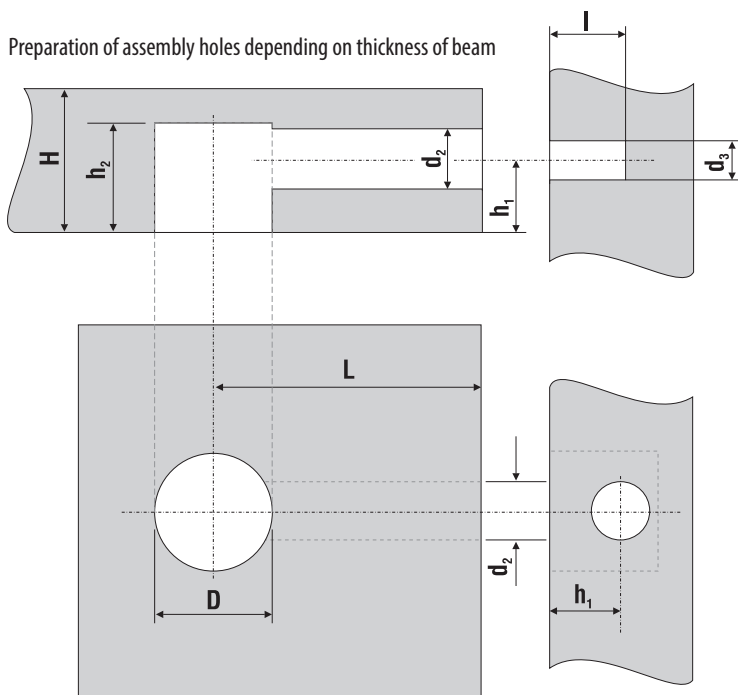

	Code	D [mm]	h [mm]	Pcs
ø15	MMS-150119	15	11,9	1000
	MMS-150132	15	13,2	1000

How to read the code MS-150019?

MMS	150	119
Typ	Średnica 15mm	Wysokość 11,9mm

Thickness of beam H [mm]	h ₁ [mm]	h ₂ [mm]	d ₂	d ₃
16	8	12,7	8	5
18	9	13,4	8	5

Remaining dimensions in product tables of MTMS and MMS



