

SFX Universal plug Ø5, Ø6, Ø8, Ø10 - nylon



100% nylon

Description

Plastic expansion plug for use with screw

Technical data

Type of installation pre-fastening installation
Substrate concrete C 20/25, solid clay brick, calcium silicate brick, autoclaved aerated concrete

Sleeve material

100% nylon

Features and advantages of the product

Features and advantages of the product



Increased collar diameter
- prevents the plug from sinking into the substrate.



Special anti-rotation fins
- prevent rotation in the substrate during installation.




Reduced diameter of the bottom part
- facilitates installation in the drill hole.



Special ribs
- a new solution which holds the sleeve firmly in place.



Unique shape
- ensures a 'knot' is formed, which makes the plug sit firmly in the void.

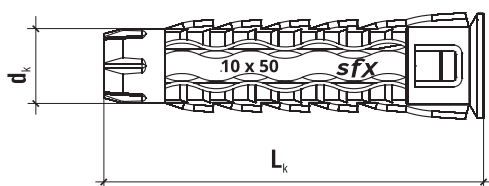

Product marking

SFX	05	025
Type	Diameter	Length

	Code	$d_k \times L_k$ [mm]	Recommended screw diameter d_w [mm]	Effective anchorage depth h_{eff} [mm]	Min. depth of drilled hole h_0 [mm]	Pcs
Ø05	SFX-05025	5.0 x 25	3.5	25	35	400
Ø06	SFX-06030	6.0 x 30	4.0	30	40	200
Ø08	SFX-08040	8.0 x 40	5.0	40	50	200
Ø10	SFX-10050	10 x 50	6.0	50	60	100
	SFX-10060	10 x 60	6.0	60	70	100