
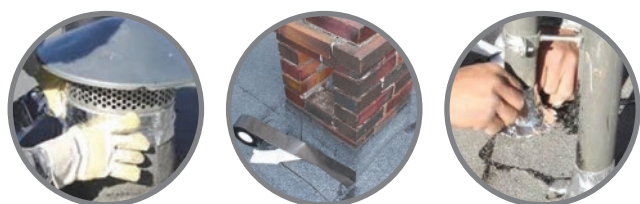


TAB Alubutyl tape

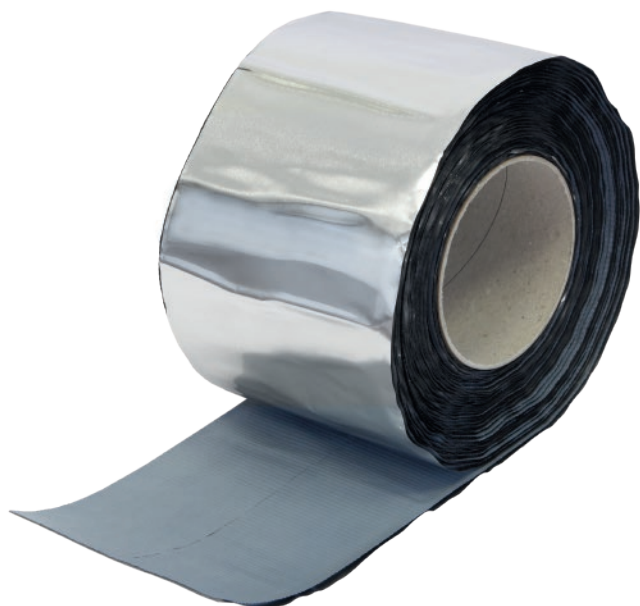

Description

Sealing tape based on butyl rubber, one side coated with plastics aluminium.

Technical data

- Base: Aluminum butyl tape
- Thickness: 0.8 mm, 1.0 mm, 1.2 mm
- Application temperature: +5° C to +40° C
- Thermal resistance: -30° C to +80° C

Application

- Sealing of ventilation ducts
- Roof sealing
- Grouting in glass-aluminum systems
- Repair seals
- For aluminum-concrete seals
- Roofing of chimneys, antenna masts, roof hatches
- Fixing and sealing of foils and building membranes for various roofing works and in traditional timber and skeleton construction.

Features and advantages

- Excellent adhesion to most construction materials
- It is self-curing with the substrate
- Resistant to water, moisture and atmospheric influences
- Allows immediate sealing
- Butyl is a flexible material that doesn't crumble over time and is an alternative to bituminous materials
- Thermal resistance from -30°C to +80°C

Code	Width [mm]	Length [mb]
TAB-040010	40	10
TAB-045010	45	10
TAB-050010	50	10
TAB-070010	70	10
TAB-100010	100	10
TAB-150010	150	10