

TSN

Nylon mesh sleeves for fastening in hollow base materials




Description

Installation in hollow base materials requires the use of mesh sleeves. TSN is a nylon mesh sleeve. Intended for standard installations at a depth of up to 130 mm.

Features and advantages

Proper bar positioning	The plug with a hole ensures easy alignment in the sleeve and prevents resin from flowing out
Reliability and durability of the installation	NYLON has been used in manufacturing of the mesh sleeve - it has stable mechanical properties for the temperature range of: - 40°C to + 200°C - it is resistant to UV and aggressive environments - it is resistant to aging and oxidation, it can be used outdoors - it is durable and flexible, increasing the anchor parameters - it has high fire resistance, it is hard to ignite and is self-extinguishing
Used in hollow materials	Specially designed mesh ensures uniform distribution and controlled application of resin during rod setting in

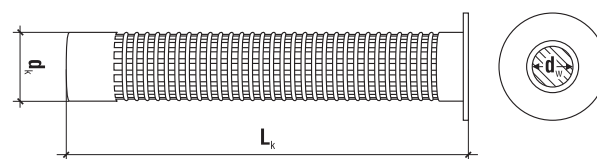

For use with injection anchors

WCF-PESF-300, WCF-PESF-E-300, WCF-PESF-C-300

	Code	$d_k \times L_k$ [mm]	d_w [mm]	Pcs.
Ø12	TSN-01	12 x 50	6 - 8	50
Ø15	TSN-02	15 x 85	10 - 12	20
	TSN-03	15 x 130	10 - 12	20
Ø20	TSN-04	20 x 85	14 - 16	20

TSM

Metal mesh sleeve for hollow materials




Description

This mesh sleeve is used in hollow materials, such as MAX hollow bricks. Mesh sleeve is 1m long, allowing for flexible embedment at depth. Only thing you need to do is cut the mesh to an appropriate length and close its end to prevent the resin from flowing out.

Features and advantages

Universality	The 1 m mesh sleeves can be cut to meet individual needs, depending on bar and hole length
Used in hollow materials	Specially designed mesh ensures uniform distribution and controlled application of resin during rod setting in

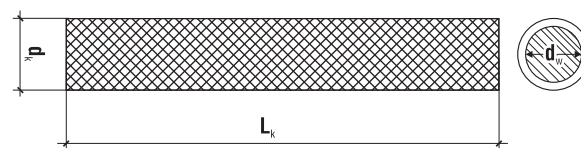

For use with injection anchors

WCF-PESF-300, WCF-PESF-E-300, WCF-PESF-C-300

	Code	$d_k \times L_k$ [mm]	d_w [mm]	Pcs.
Ø12	TSM-12	12 x 1000	8	1
Ø16	TSM-16	16 x 1000	10 - 12	1
Ø22	TSM-22	22 x 1000	16	1
Ø26	TSM-26	26 x 1000	20	1