

WKOS / WKOD Confirmat screw



Description

Application	Screw mainly applied for execution of chipboard connections, plywood connections, sterling board connections, wooden elements.
Type of installation	Prior to fastening the screw, it is first of all required to drill a hole with a special drill bit for a confirmat screw.
Substrate	Chipboard, plywood, wood, sterling board, MDF board
Material	Zinc-plated low carbon steel

Features and advantages



Flat head

Head construction facilitates the aesthetic and long-lasting connection, as well as screw being ideally flush with board



Hex key slot

Certain adjustment of key facilitates fast assembly of the elements




Profile of thread

Specially designed profile of thread enables to the quick assembly, while the fastening of elements is long-lasting



Blunt ending of thread with guide

The blunt ending of thread facilitates its axis guide in the assembly hole, as well as enabling the full use of its length for reinforcing the connection

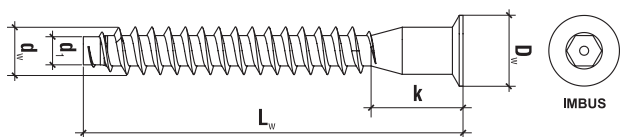

	Code	$d_w \times L_w$ [mm]	D / k [mm]	Pre drilling [mm]	Pcs
ø6.3	WKOD-63050	6.3 x 50	10 / 10	4.3	2500
	WKOS-63050	6.3 x 50	10 / 10	4.3	200
ø7.0	WKOD-70050	7.0 x 50	10 / 12	4.7	2400
	WKOS-70050	7.0 x 50	10 / 12	4.7	200
	WKOD-70070	7.0 x 70	10 / 12	4.7	1800
	WKOS-70070	7.0 x 70	10 / 12	4.7	200

