

WSR-T

Self-drilling screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 1.25 mm thick profiled roof sheets



Substrate: by ETAG 006



Substrate: profiled roof sheets of 0.50 - 1.25 mm in thickness

NEW!

Description

Self-drilling screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 1.25 mm thick profiled roof sheets.

Technical data

Substrate	Profiled roof sheets of 0.50 ÷ 1.25 mm in thickness
Corrosion protection	ceramic coating

Material

carbon steel

Features and advantages of the product

300 mm

Screw length

We manufacture screws up to 300 mm long



TX-20

TX drive guarantees optimum torque transfer.



Ceramic coating


Highest corrosion protection



Self-drilling tip

With a sharp bit which reduces torque, it makes for exceptionally fast drilling through metal sheets

WSR-T Self-drilling screw for fastening of flat roof thermal insulation and waterproofing systems to 0.50 ÷ 1.25 mm thick profiled roof sheets

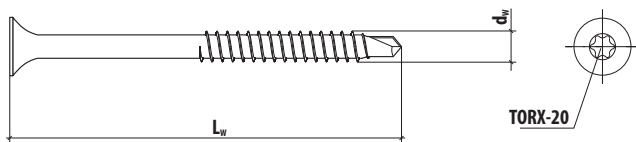

Product marking

WSR-T	48	300	D
Type	Diameter	Length	Type of coating

	Code	$d_w \times L_w$ [mm]	Maximum drilling capacity [mm]	TX	Pcs
ø4,8	WSR-T-48040-D	4.8 x 40	2 x 1.25	TX-20	100
	WSR-T-48050-D	4.8 x 50	2 x 1.25	TX-20	100
	WSR-T-48060-D	4.8 x 60	2 x 1.25	TX-20	100
	WSR-T-48070-D	4.8 x 70	2 x 1.25	TX-20	100
	WSR-T-48080-D	4.8 x 80	2 x 1.25	TX-20	100
	WSR-T-48090-D	4.8 x 90	2 x 1.25	TX-20	100
	WSR-T-48100-D	4.8 x 100	2 x 1.25	TX-20	100
	WSR-T-48120-D	4.8 x 120	2 x 1.25	TX-20	100
	WSR-T-48140-D	4.8 x 140	2 x 1.25	TX-20	100
	WSR-T-48160-D	4.8 x 160	2 x 1.25	TX-20	100
	WSR-T-48180-D	4.8 x 180	2 x 1.25	TX-20	100
	WSR-T-48200-D	4.8 x 200	2 x 1.25	TX-20	100
	WSR-T-48220-D	4.8 x 220	2 x 1.25	TX-20	100
	WSR-T-48240-D	4.8 x 240	2 x 1.25	TX-20	100
	WSR-T-48260-D	4.8 x 260	2 x 1.25	TX-20	100
WSR-T-48300-D	4.8 x 300	2 x 1.25	TX-20	100	

TX drive WSR-T screws are only made to order!

Packing



WSR-T screws are supplied in sturdy cardboard boxes