


TD060/TDP060 Special screwed-in fastener with steel screw for fixing mineral wool and polystyrene foam



AT-15-9228/13



TD060



TDP060

Description

Special screwed-in fastener with steel screw for fixing mineral wool and polystyrene foam in timber. - installation only in two operations - large scope and type of screws used for various substrates - low point thermal transmittance coefficient - integrated plug on clamping flange

TYPE OF INSTALLATION – SURFACE FIXING - VISIBLE

Technical data


Compatible screws - KDH, KMH, KDHT, KMHT

Anchorage depth h_{ef} [mm] 25* 18** 12,5***

*Timber C22, ** OSB, ***Anchorage depth

DESIGN PULL-OUT RESISTANCES

Substrate	Substrate thick [mm]	Screw diameter	Value [kN]
Timber C22	25.0	ø5.0	1.19
Timber C22	40.0	ø5.0	2.12
OSB	12.5	ø5.0	0.31
OSB	18.0	ø5.0	0.47
Fibreboard	12.5	ø5.0	0.32
Drewno C22	25.0	ø6.0	1.55
Drewno C22	40.0	ø6.0	2.77
OSB	12.5	ø6.0	0.35
OSB	18.0	ø6.0	0.51
Fibreboard	12.5	ø6.0	0.22

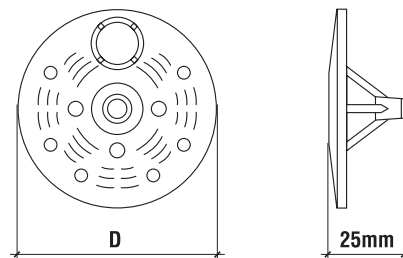

Code	Material	D [mm]	Pcs
TD060	Nylon	64	100
TDP060	Polypropylene	64	100

Code	Insulation material thickness [mm]	Fastener
TD060, TDP060	30	KDH-05060
TD060, TDP060	40	KDH-05070
TD060, TDP060	50	KDH-05080
TD060, TDP060	60	KDH-05090
TD060, TDP060	70	KDH-05100
TD060, TDP060	80	KDH-06110
TD060, TDP060	90	KDH-06120
TD060, TDP060	100	KDH-06140
TD060, TDP060	110	KDH-06140
TD060, TDP060	120	KDH-06160
TD060, TDP060	130	KDH-06160
TD060, TDP060	140	KDH-06180
TD060, TDP060	150	KDH-06180
TD060, TDP060	160	KDH-06200
TD060, TDP060	170	KDH-06200
TD060, TDP060	180	KDH-06200

