

LINO 15 Plastic sleeve Ø 15 for fixing of flat roof thermal insulation and waterproofing systems

NEW!



ETA-15/0578



PE/PP**

Description

Plastic sleeve for fixing of flat roof thermal insulation and waterproofing systems to be used with self-tapping or self-drilling screws

Technical data

Compatible screw types and diameters WDB-4.8 mm, WDB-T-4.8 mm (TX-20), WSR-4.8 mm, WSR-T-4.8 mm (TX-20), WBSW-6.3 mm

Material



Features and advantages of the product



Telescopic design

Telescopic design prevents damage to waterproofing systems; fastener's internal air pocket reduces the effect of thermal bridging



Special protrusions


Special protrusions on the inside of the fastener prevent the screw from popping up



Product marking

Easy to identify

Substrate: by ETAG 006



Substrate: profiled roof sheets of 0.50 - 1.25 mm in thickness




Substrate: concrete C12/15, C20/25, thin wall concrete panel



Substrate: timber C24, OSB board, plywood

LINO 15 Plastic sleeve Ø 15 for fixing of flat roof thermal insulation and waterproofing systems

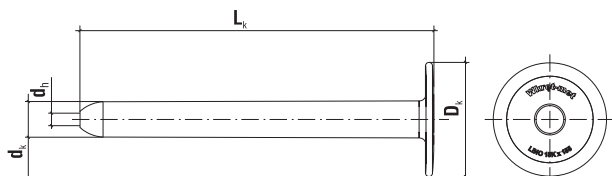

Product marking

LINO	15	285	PE	(100)
Type	Diameter	Length	Polyethylene	Number of pieces in a box


	Code	L _k [mm]	d _k [mm]	D _k [mm]	d _h [mm]	Pcs
Ø15 PE	LINO15035PE(200)	35	15	50	6.3	200
	LINO15055PE(200)	55	15	50	6.3	200
	LINO15085PE(200)	85	15	50	6.3	200
	LINO15105PE(200)	105	15	50	6.3	200
	LINO15135PE(200)	135	15	50	6.3	200
	LINO15155PE(200)	155	15	50	6.3	200
	LINO15185PE(200)	185	15	50	6.3	200
	LINO15235PE(100)	235	15	50	6.3	100
	LINO15285PE(100)	285	15	50	6.3	100
Ø15 PP**	LINO15035PP(200)**	35	15	50	6.3	200
	LINO15055PP(200)**	55	15	50	6.3	200
	LINO15085PP(200)**	85	15	50	6.3	200
	LINO15105PP(200)**	105	15	50	6.3	200
	LINO15135PP(200)**	135	15	50	6.3	200
	LINO15155PP(200)**	155	15	50	6.3	200
	LINO15185PP(200)**	185	15	50	6.3	200
	LINO15235PP(100)**	235	15	50	6.3	100
	LINO15285PP(100)**	285	15	50	6.3	100

** - Product for inquiry and order


Packing



Recommended for thermal insulation materials



polystyrene foam



mineral wool



PIR foam



PUR foam

Wkręt-met LINO plastic fixings are also conveniently packed in plastic bags, which makes storing and carrying them on roofs in different weather conditions easier and safer.